



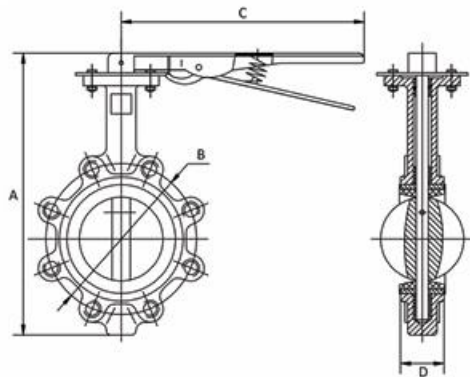

Lugged Cast Iron Butterfly Valve - SS Disc

- Cast iron, stainless steel disc
- Table E threaded stud pattern
- Maximum nominal working pressure 230 PSI / 16 Bar
- EPDM seal temperature rating 120°C
- EPDM is suitable for hot water, steam, alcohols, coolants, acids and bases
- Lockable lever with 10 position stainless steel notch plate

Nominal Size	A	B	C	D
50	252	114	220	42
65	296	127	220	44.7
80	308	146	220	45.2
100	346	178	255	52.1
125	349	210	255	54.4
150	397	235	255	55.8
200	480	292	358	60.6
250	540	356	358	65.6
300	592	406	500	76.9

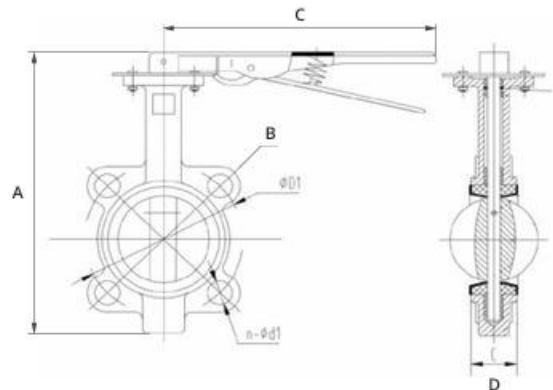

Wafer Cast Iron Butterfly Valve - SS Disc

- Cast iron, stainless steel disc
- Wafer bolt pattern
- Maximum nominal working pressure 230 PSI/16 Bar
- EPDM seal temperature rating 120°C
- EPDM is suitable for hot water, steam, alcohols, coolants, acids and bases
- Lockable lever with 10 position stainless steel notch plate
- 400mm comes with a gearbox option only

Nominal Size	A	B	C	D
50	235	114	220	42
65	239	127	220	44.7
80	285	146	220	45.2
100	322	178	255	52.1
125	349	210	255	54.4
150	383	235	255	55.8
200	455	292	358	60.6
250	513	356	358	65.6
300	592	406	500	76.9